

Features

- ★ Small Footprint
- ★ In-Out Isolation Voltage 1000 VDC
- ★ 14 PIN DIP Package
- ★ Temperature Range:-40℃ to +85℃
- ★ UL94V-0 Inflaming retarding package
- ★ MTBF>1million hours(25℃)




Applications

The A_D-2W Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to where:

- 1) 1000 VDC input and output isolation;
- 2) Input voltage variation $\leq \pm 10\%$;
- 3) Regulated and low ripple noise is not required.

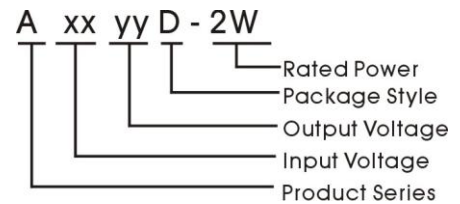


Model Detail List Specification

Model Number	Input Voltage range (nominal voltage)	Output Voltage	Output Current (mA)		Input Current full load. (mA)		Efficiency	Max. Capacitive Load(μF)
			Min.	Max.	Max.	Min.		
A0505D-2W	4.5~5.5VDC (5 VDC)	±5.0V	±20	±200	271	40	82%	200
A0509D-2W		±9.0V	±11	±111	267		83%	
A0512D-2W		±12.0V	±8	±83	263		84%	
A0515D-2W		±15.0V	±7	±67	262		85%	
A1205D-2W	10.8~13.2VDC (12 VDC)	±5.0V	±20	±200	112	36	82%	
A1209D-2W		±9.0V	±11	±111	111		83%	
A1212D-2W		±12.0V	±8	±83	109		84%	
A1215D-2W		±15.0V	±7	±67	109		85%	
A2405D-2W	21.6~26.4VDC (24 VDC)	±5.0V	±20	±200	55	24	83%	
A2409D-2W		±9.0V	±11	±111	55		84%	
A2412D-2W		±12.0V	±8	±83	54		85%	
A2415D-2W		±15.0V	±7	±67	54		86%	

1. Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

Model test circuit

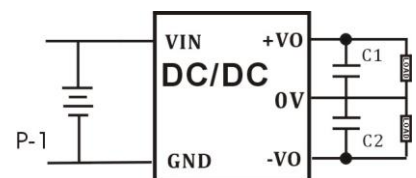

Output Specifications

Item	Test Conditions	Min.	Typ.	Max.	Unit
Output Power		0.2		2	W
Line Voltage Regulation	For Vin change of $\pm 1\%$			± 1.5	%
Load regulation	10% to 100% load	5V output	10	15	
		12V output	8	15	
		15V output	6	15	
		24V output	5	15	
Ripple	20MHz Bandwidth		50		mVp-p
Noise			75		
Temperature Drift	100% full load			± 0.03	%/°C
Input Filter		C Filter			

Environmental Specifications

Item	Test Conditions	Min.	Typ.	Max.	Unit
Storage Humidity	Non condensing			95	%
Temp. rise at full load			-25		°C
Operating Temperature		-40		+85	
Storage Temperature	Power derating (above 85°C)	-55		+125	
Cooling		Free air convection			





Common Specifications

Item	Test Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage	Tested for 1 minute and leakage current less than 1 mA	1000			VDC
Switching Frequency	Full load, nominal input		100		KHz
MTBF	MIL-HDBK-217F@25°C	1000			K hours
Isolation Resistance	Test at 500VDC	1000			MΩ
Weight			2.5		g


Input Specifications

Item	Test Conditions	Min.	Typ.	Max.	Unit
Input Max. voltage	5 VDC Input (4.5~5.5V)			6	VDC
	12 VDC Input (10.8~13.2V)			14.4	
	24 VDC Input (21.6~26.4V)			28.8	
Input surge voltage (1 sec. Max.)	5 VDC Input (4.5~5.5V)	-0.8		10	VDC
	12 VDC Input (10.8~13.2V)	-0.8		20	
	24 VDC Input (21.6~26.4V)	-0.8		32	

Product typical Curve

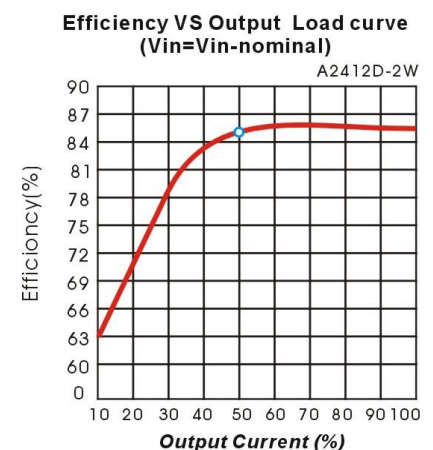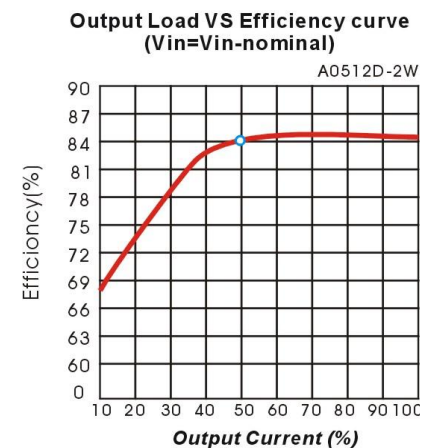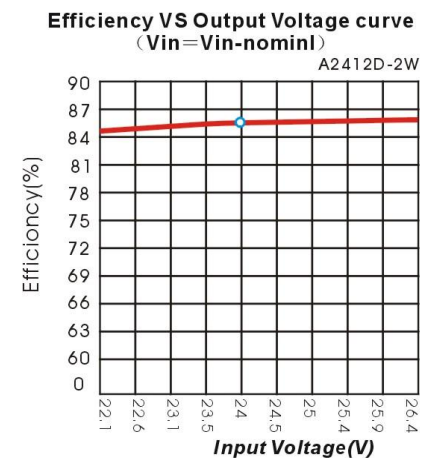
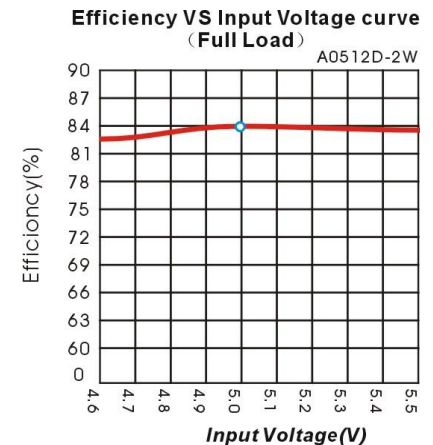


Mechanical Dimensions & Recommended Footprint

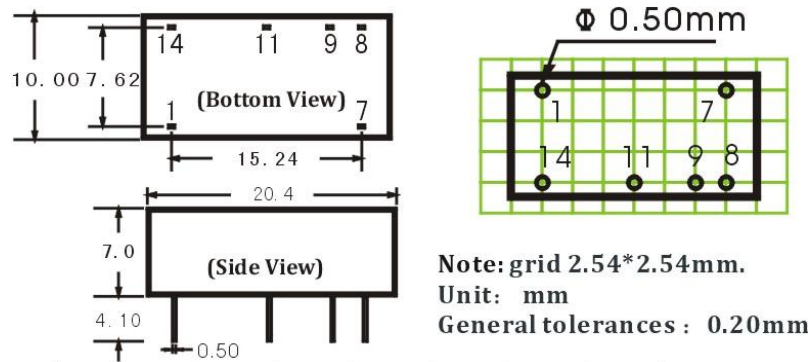


Package	Vin	GND	-Vo	OV	+Vo	NC
AD	14	1	11	8	9	7

Tolerance Envelope Curve & Temperature Derating Graph

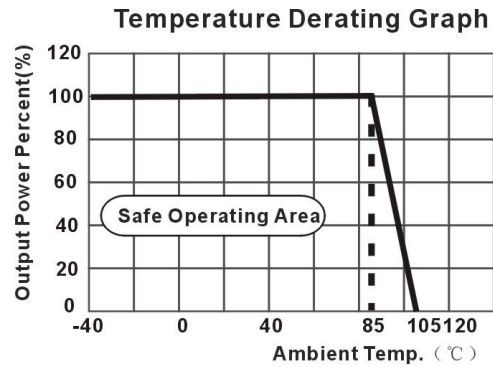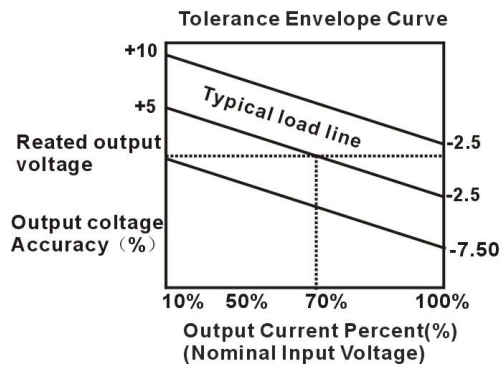

EMC Recommended Circuit

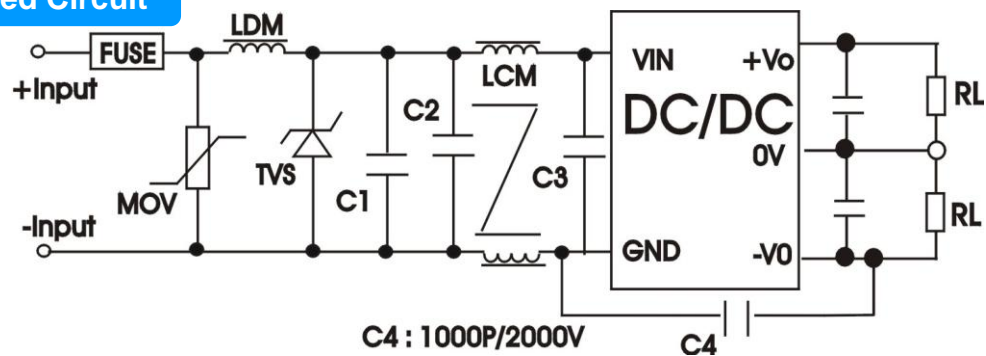

EMC Module Application Circuit

