

Features

- ★ In-Out Isolation Voltage 2500 VAC
- ★ DIP Package
- ★ Temperature Range:-40℃ to +85℃
- ★ UL94V-0 Inflamming retarding package
- ★ MTBF>1million hours(25℃)
- ★ Short-circuit protection
- ★




Applications

The HAB_D-5W Series are these AC-DC converters, you can reduce the design point of failure and save the development of micro power supply's manpower, material and time costs, also better ensure product quality stability, protect safety and reliability of the end of products. These products apply to where:

1. Input and output isolation noise is required.
2. Regulated and low ripple noise is required.

Such as: tele-communications etc, industrial control.

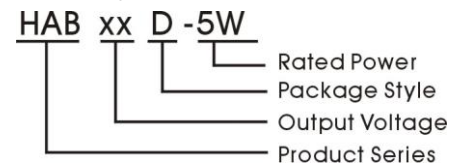

Model Detail List Specification

Model Number	Input Voltage	Output Voltage	Output Current (mA)		Efficiency	Max. Capacitive Load(μF)
			Min.	Max.		
HAB05D-5W	85~265VAC (90~375VDC)	5.0V	100	1000	72%	1000
HAB12D-5W		12.0V	41	417	78%	
HAB15D-5W		15.0V	33	333	81%	
HAB24D-5W		24.0V	20	208	83%	


Environmental Specifications

Item	Test Conditions	Min.	Typ.	Max.	Unit
Storage Humidity	Non condensing			95	%
Temp. rise at full load			25	40	℃
Operating Temperature		-40		+85	
Storage Temperature	Power derating (above 85℃)	-55		+125	
Soldering Temperature	1.5mm from case for 10 seconds			300	
Isolation Voltage	Tested for 1 minute and leakage current less than 1 mA	2500			VAC
Switching Frequency	Full load, nominal input		100		KHz
MTBF	MIL-HDBK-217F @25℃	1000			K hours
Isolation Resistance	Test at 500VDC	1000			MΩ
Weight			30		g
Cooling		Free air convection			


Output Specifications

Item	Test Conditions	Min.	Typ.	Max.	Unit
Output Power		0.5		5	W
Line Voltage Regulation	For Vin change of $\pm 1\%$			± 0.5	%
Load regulation	10% to 100% load			0.5	
Ripple	20MHz Bandwidth		50		mVp-p
Noise			75		
Temperature Drift	100% full load			± 0.03	$\%/^{\circ}\text{C}$
Isolation Capacitance			300		pF
Short Circuit Protection	Continuous, automatic recovery				


Temperature Derating Graph

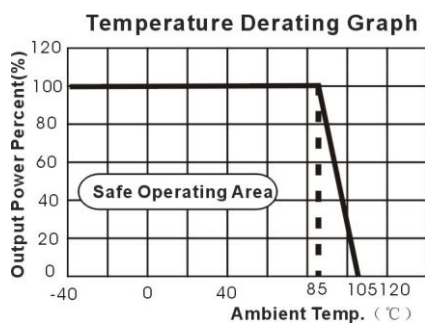

Model test circuit

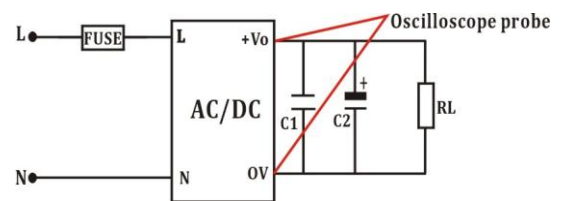

Mechanical Dimensions & Recommended Footprint

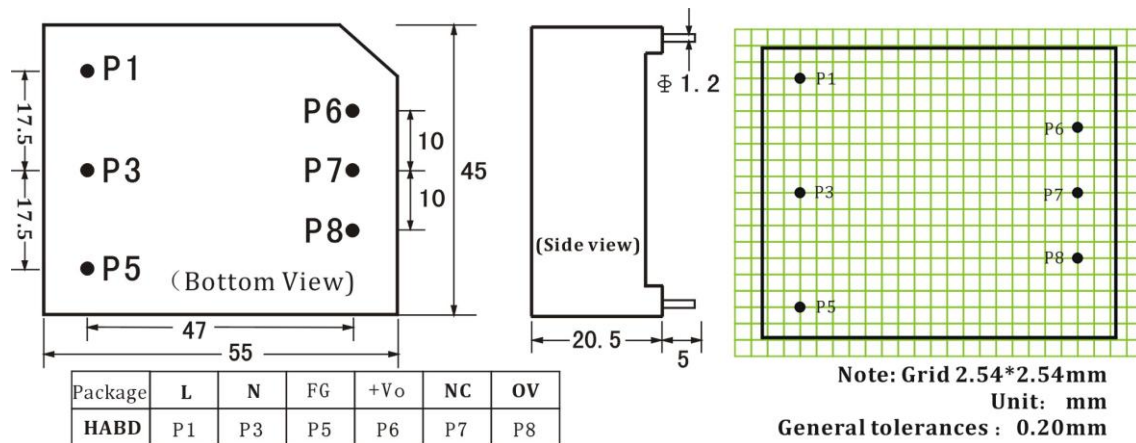

EMC Module Application Circuit

